


Operating manual - Archive document -

Pt 100 temperature relay TR 600

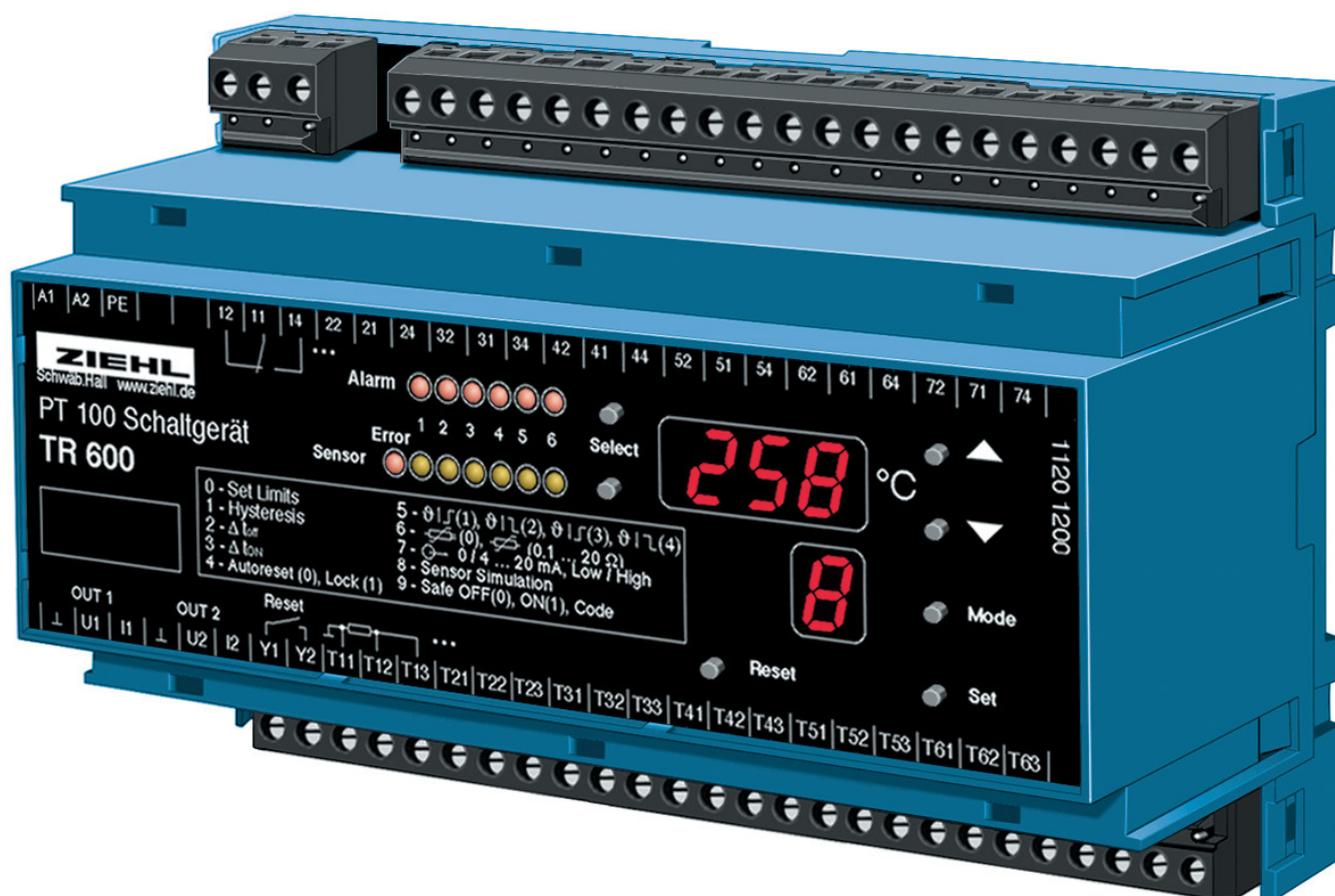

Contents

Page

Application and short description	3
Overview of functions.....	3
Connection plan.....	3
Display and operating elements.....	4
Function diagram	4
Important notes	5
Assembly	6
Putting into operation	6
Remarks	6
Table of function	7
Setup	7
Trouble shooting	8
Technical data	9
Form	11

Application and short description

The Pt 100 thermostat TR 600 is a temperature controller and monitors up to six Pt 100 sensors at the same time. Six switching points and six relays permit almost any combination of switching action. It also can select the highest temperature of a group of three or six sensors. The temperatures of two sensors or groups of sensors can be issued to 2 analog outputs i.e. for remote displays or further evaluation. Programming is very variable and simple. Due to the fact that 6 type Pt 100 sensors can be connected, the unit is especially suitable for temperature monitoring wherever up to 6 different measuring points must be monitored simultaneously:

- motors and generators with simultaneous monitoring of bearings and coolant.
- transformers with additional monitoring of the core temperature also.
- power machines and plants

Approval




USL, CNL Industrial Control Equipment 82VN


Overview of functions

- Measuring and monitoring range -199 ... +800 °C
- 6 sensor inputs with 2- or 3-wire connection
- 7 relay outputs with change-over contact
- Alarm 1 ... 6 relay K1 (11/12/14) ... K6 (61/62/64)
- Sensor Error Relay K7 (71/72/74) monitors sensor break or sensor short circuit.
- 2 analog outputs, 0/4...20 mA and 0/2...10 V, with individual scaling.
- Universal power supply. 2 ranges AC/DC 24-60V or AC/DC 90-240 V

Connection plan:

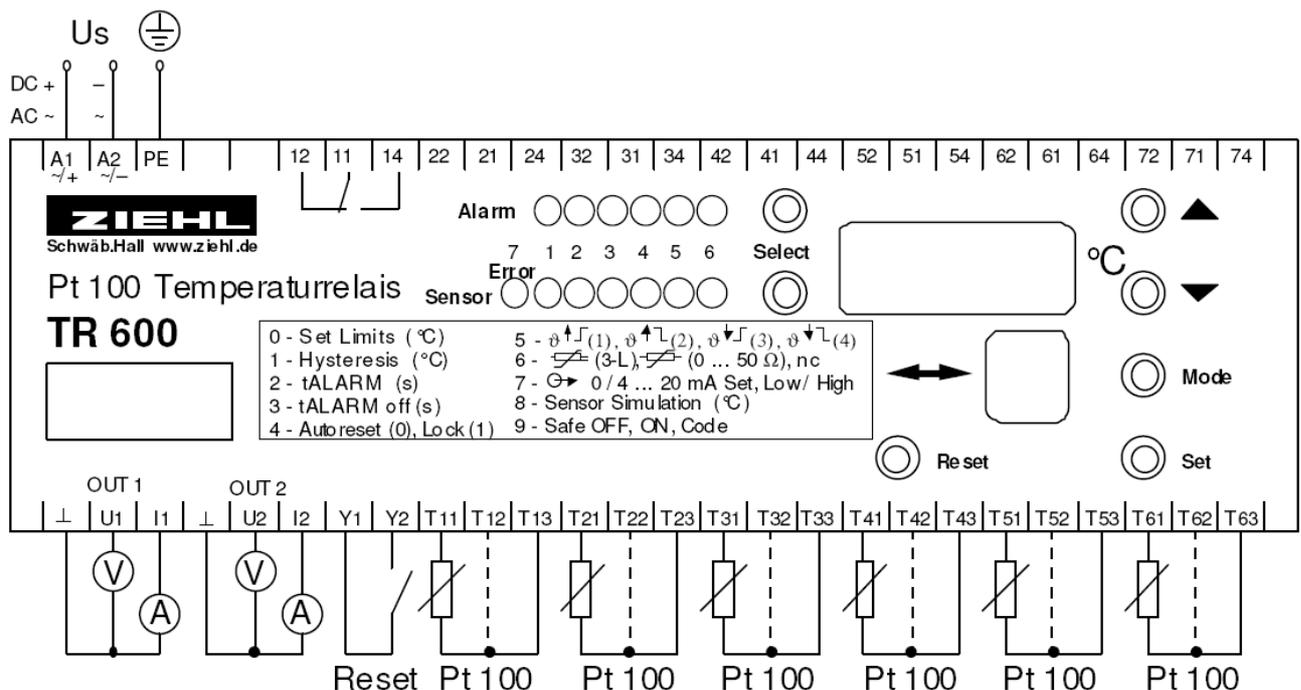


Display and operating elements

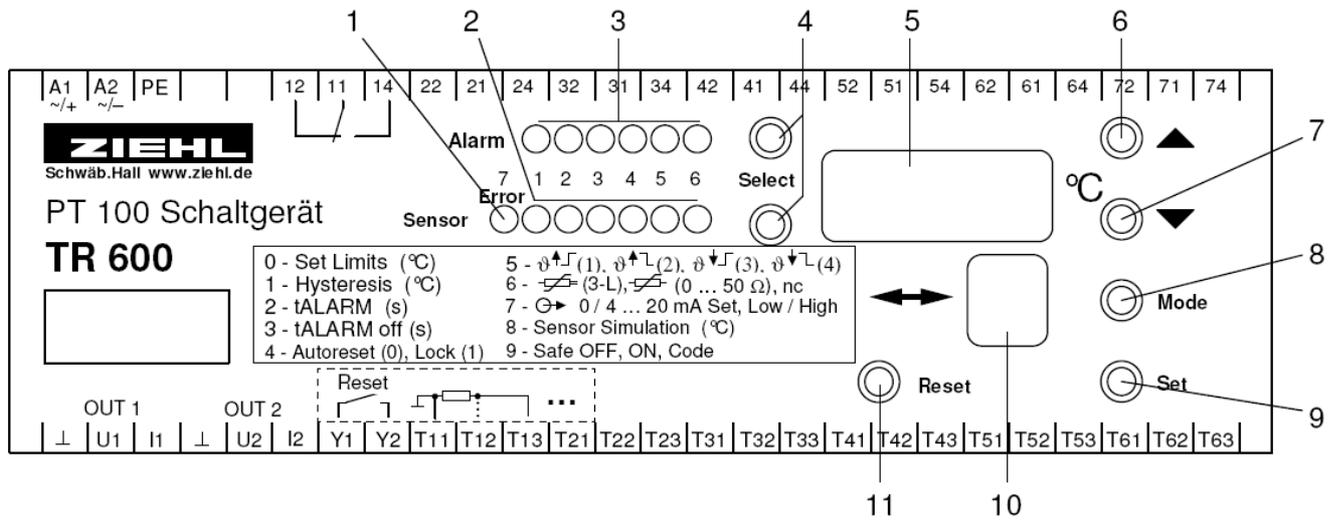


- 1 LED Sensor Error
- 2 6x LED Sensor
- 3 6x LED Alarm
- 4 Select buttons
- 5 Display, 3 digits
- 6 Up button
- 7 Down button
- 8 Mode button
- 9 Set button
- 10 Display, 1 digit (Mode)
- 11 Reset button

Function diagram

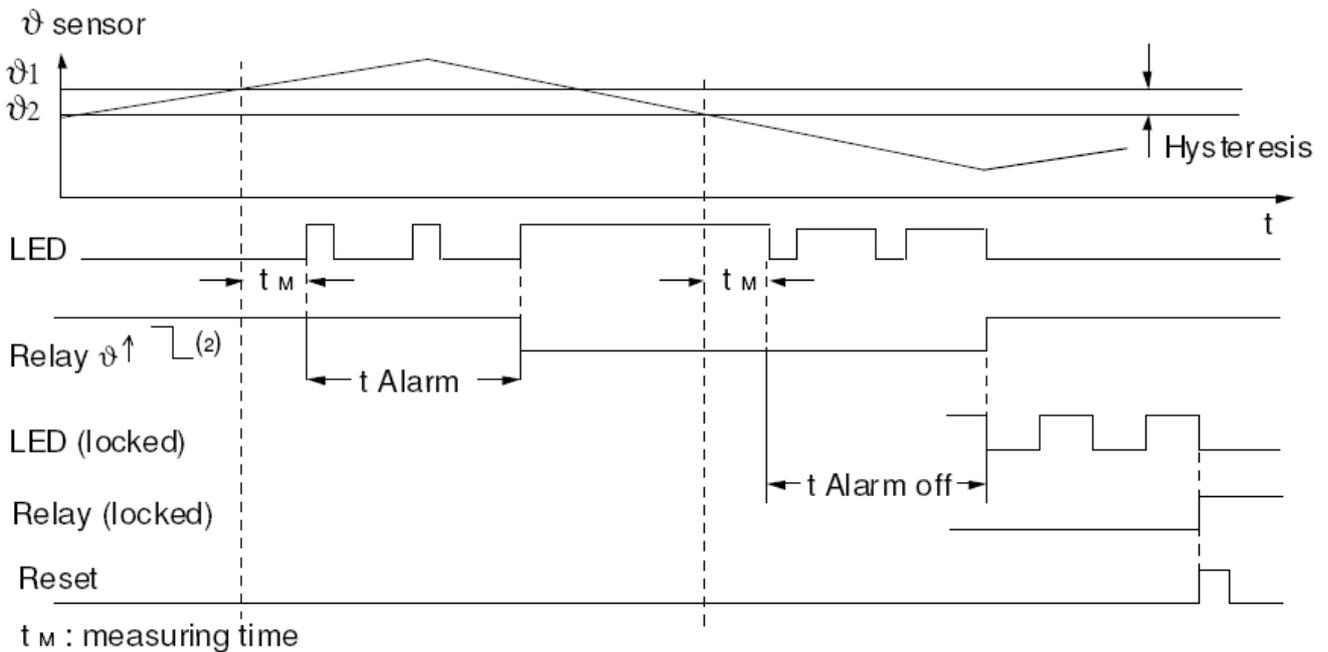

Important notes



ATTENTION

Dangerous electrical voltage!

May lead to electrical shock and burn.

Before beginning of work switch unit and equipment free of voltage.

To use the equipment flawless and safe, transport and store properly, install and start professionally and operate as directed.

Only let persons work with the equipment who are familiar with installation, start and use and who have appropriate qualification corresponding to their function. They must observe the contents of the instructions manual, the information which are written on the equipment and the relevant security instructions for the setting up and the use of electrical units.

The equipments are built according to DIN / EN and checked and leave the plant according to security in perfect condition. If, in any case the information in the instructions manual is not sufficient, please contact our company or the responsible representative.

Instead of the industrial norms and regulations written in this instructions manual valid for Europe, you must observe out of their geographical scope the valid and relevant regulations of the corresponding country.

Observe the maximum temperature permissible when installing in switching cabinet. Make shure sufficient space to other equipment or heat sources. If the cooling becomes more difficult e.g. through close proximity of apparatus with elevated surface temperature or hindrance of the cooling air, the tolerable environmental temperature is diminishing.

ATTENTION!

Connecting temperature sensors Pt 100

Temperature sensors must be connected to the plug-in terminals T11, T12, T13 etc.

To ensure proper operation this plug-in terminals have gold-plated contacts. Do not use these plugs for other terminals.

Universal power supply

The universal power supply works within the ranges AC/DC 24-60 V or AC/DC 90-240 V. Before switching on make sure, that the operational voltage U_s of the type- plate and the mains voltage are the same.



Attention!

The sensor-alarm-relay K7 signals an error in a sensor. The relays for the alarms 1-6 do not switch with a disturbance in a sensor. When relay K7 is programmed in closed-circuit current mode (= release at alarm = factory setting), also an interruption of the supply voltage and an instrument failure are reported. We recommend the evaluation off K7.

Assembly:

- mount on 35 mm mounting rail according to EN 60715
- wall-mount with 3 x screws M4
- connecting wires refer to the connection plan to prevent miss-operation and malfunction.

Putting into operation

Remarks

- **LEDs Alarm**

off:	temperature below switching point
on:	temperature beyond switching point
blinking 1x on 4x off:	alarm-relay delay time t_{ALARM} is running
blinking 4x on 1x off:	alarm-relay delay time t_{ALARM} off is running
blinking 1x on 1x off:	relay locked, ready for reset

Alarm-relay can be resetted with reset-push-button or external contact closed Y1, Y2. A closed contact or short circuit at terminals Y1-Y2 means no autoreset function.

- **Operating delay time – measuring time t_M**

The operating delay time of the relay depends on the number of connected sensors and the measuring function. With continuous change of temperature the measuring time t_M is about 1,5 s. With abrupt change of temperature the measuring time t_M is about 3 ... 4 s (for example by simulation of temperature changes in mode 8). With sensor short circuit or sensor interruption the measuring time t_M increases to 6...8 s.

- **Relay locked aktive (Mode 4 = "1")**

In this mode the relay can switch on when all the following parameters are fulfilled:

- the temperature decreases below the switching back limit
- the alarm relay delay-time t_{ALARM} off has overrun
- a reset signal Y1,Y2 (reset push-button or external closed contact) is done or the mains (supply voltage) is switched off an on.

In the ready for reset status the alarm-LED will be blinking 1x on 1x off .

- **2-wire technique line resistance compensation**

To compensate the line resistance short-circuit the wires nearby the sensor and measure the line resistance. Setting see mode 6.

We recommend to use 2 or better 3 wires for each sensor. With 2-wire connection and a common line for all signals, all sensor measuring currents will be added on the common line. Thus the value of the compensation line resistance R_K must be calculated as follows:
 $R_K = (n+1) \times R_L/2$ (R_L = line resistance of two wires, n = number of sensors)

- **Sensor simulation**

If no button is pushed within 15 minutes the relay automatically returns in the normal function mode.

Table of function

Function	Key	Display
Sensor temperature	Sensor select 1 ...6	Measuring temperature of selected sensor
ϑ - MAX	Δ	Highest measured temperature
ϑ - MIN	∇	Lowest measured temperature
ϑ - MIN - MAX- Reset	Δ or ∇ + Reset	Measured temperature
Relay locked Reset	Reset	
Switching points	Alarm select 1 ...6	Adjusted limit and sensor or sensor group

Setup *

Mode	Function	Alarm select (Alarm=Relay)	Sensor select	Display	SET	Factory Adjust
0	Switching Point (°C)	Relay 1...6	Sensor 1...6 group 1+2+3 group 4+5 group 4+5+6 group 1...6	-199°...800°C	Store	100 °C Alarm 1 = Sensor 1 ... Alarm 6 = Sensor 6
1	Hysteresis (K)	Relay 1...6	-	1 ...20 K	Store	3 K
2	t _{ALARM} (s)	Relay 1...6	-	0,1 ... 20,0 s	Store	0,1 s
3	t _{ALARM off} (s)	Relay 1...6	-	0 ... 999 s	Store	0 s
4	autoreset - locked	Relay 1...6	-	0 = autoreset 1 = locked	Store	0 = autoreset
5	Operating function Max-NO contact Max-NC contact Min-NO contact Min-NC contact	Relay 1...6 Sensor alarm (Relay K7)	-	1 = ϑ↑  2 = ϑ↑  3 = ϑ↓  4 = ϑ↓ 	Store	2 = ϑ↑ 
6	Sensor connection 3-wire not connected 2-wire (Ω)	-	sensor 1...6	3-.L n.c. 0...50,6		3-.L
7	Analog out Zero FullScale	Out 1 = 1 Out 2 = 2 - -	sensor 1...6 group 1+2+3 group 4+5 group 4+5+6 group 1...6 - -	0 = 0...20 mA 0 = 0...10 V 4 = 4...20 mA 4 = 2...10 V -199°...800°C -199°...800°C	Store Store Store	Out 1 = group 1+2+3 Out 2 = group 4+5+6 0 °C = 0 mA 100 °C = 20 mA
8	Sensor Simulation	-	sensor 1...6	-199°...800°C	-	
9	Code safe = off Code safe = on	-	-	off = 500 on = 504	Store	500

* return within 30 s without any button pushed

Trouble shooting

- **LED sensor error**

The LED sensor error indicates a failure at a sensor and the sensor-LED blinks. The sensor alarm relay K7 has switched. Refer to operation mode 5. Also see analog output.

- **Display**

EEE sensor interruption or over-range
-EE sensor short circuit or under -range

- **Analog output 0 mA/0 V**

Any sensor or group of sensors can be programmed to an analog output (mode 7). If sensor failure short circuit or sensor interruption is detected the output current is 0 mA and the output voltage 0 V

- **Reset to factory adjust**

When pushing the buttons "Reset" and "Set" simultaneously > 5 s all programmed parameters will be set back to factory adjust. Code save must be off. If code save is on, see mode 9.

- **No parameter setup possible - code save on**

Code save protects the relay against unallowed manipulations. With code save on no programmed parameters can be changed. The factory code is 504 and cannot be changed by the user. See setup mode 9.

- **Failure display "E 0", sensor error relay K7 switching**

Operation failure. Switch off the supply voltage and restart. When the failure is still going on, the relay should be replaced and send to the factory.

- **Failure display "E 1" oder "E 2", sensor error relay K7 switching**

EEPROM parameter failure. Check all programmed parameters and setup new when necessary. Switch off the supply voltage and restart again. When the failure is still going on, the relay should be replaced and send to the factory.

- **Sensor alarm relay K7**

Sensor alarm relay K7 with operating function 2 = NC-contact releases at any failure and signals an interruption of power-supply.

ATTENTION! . There is a short alarm-signal of K7 when switching-on the supply-voltage.

Sensor alarm relay K7 with operating function function 1 = NO-contact picks up at any failure.

ATTENTION: There is no alarm-signal of K7 if interruption of power supply occurs.

See setup mode 5.

In case of any other malfunctions, replace device and send it in together with a description of the occurred malfunction.

- **Anzeige der Softwareversion:** im Anzeigemodus 4 s lang "Set" drücken.

Analog output:

Voltage output	DC 0/2 V – 10 V , max. DC 10 mA
Current output	DC 0/4 mA – 20 mA
Output resistance current	max. 500 Ω
No-load voltage	max. DC 16 V
Accuracy	1% of span ±1 K

Max. Ambient Temperature:


Operating Temperature	-20 °C to +65 °C
Storage Temperature	-20 °C to +70 °C
no condensation permitted	

Housing:

Dimensions (H x W x D)	Typ V8 140 x 90 x 58 mm
Mounting height / Width	55 mm / 4 TE
Line connection solid wire	per 1 x 1,5 mm ²
Stranded wire with isolated ferrules	per 1 x 1,0 mm ²
Torque	0,5 Nm (3,6 lb.in)
Protection class housing	IP 31
Protection class terminals	IP 20
Fitting position	any
Mounting	Snap mounting on 35 mm standard rail EN 60715 or M4 screws
Weight	app. 350g

Subject to technical modifications

Form V8: dimensions in mm

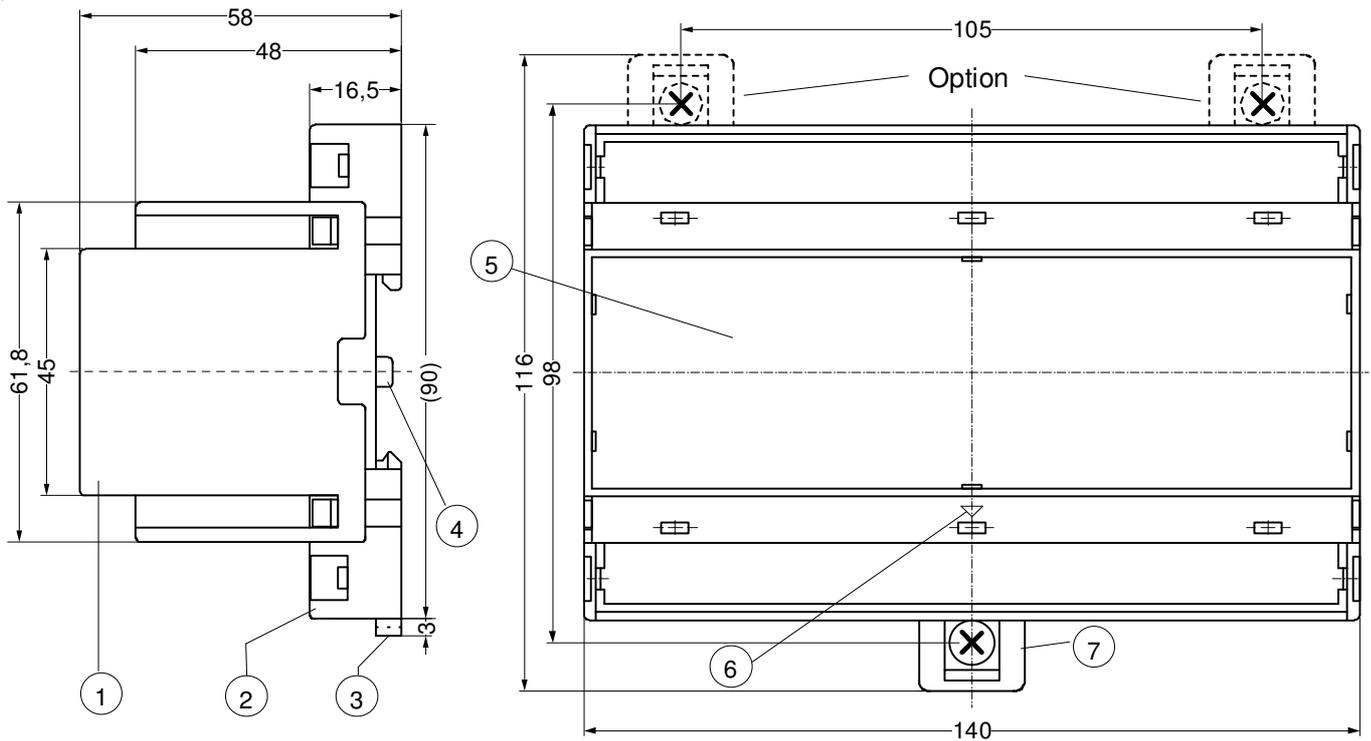

- 1 Oberteil / cover
- 2 Unterteil / base
- 3 Riegel / bar for snap mounting
- 4 Plombenlasche / latch for sealing
- 5 Frontplatteneinsatz / front panel
- 6 Kennzeichen für unten / position downward
- 7 Riegel bei Wandbefestigung mit Schrauben. Riegelbohrung $\text{\O} 4,2 \text{ mm}$ / for fixing to wall with screws, $\text{\O} 4,2 \text{ mm}$.

You'll find this and other user manuals also in english written in the internet under www.ziehl.com