

Universal relay box type URB40

Extension for universal relay (UR) with additional relay outputs, communication via Modbus RTU

URB40



Part number:

URB40

T224356

Relay extension box type URB40, for universal relay box type UR

The URB40 universal relay box is an extension box for UR devices that can be used to control up to four additional relay outputs via Modbus RTU. The URB40 monitors the communication between the devices and can transfer each relay output to a predefined state in the event of a timeout. The device has no operating elements and is controlled and configured exclusively via the RS-485 interface.

Application:

With the URB40, an additional four alarms and relays are available, and the device can also be easily operated on other control systems via the integrated RS 485 interface.

- 4 additional alarms
- No additional control system required
- Easy extension of existing control systems of the UR series
- Space-saving installation

Control voltage:

DC/AC 24-270 V 0/50/60 Hz


Output relay:

4 x 1 changer max. AC 300 V; DC 300 V

Interfaces:

RS485 (Modbus RTU)

Connection diagram:

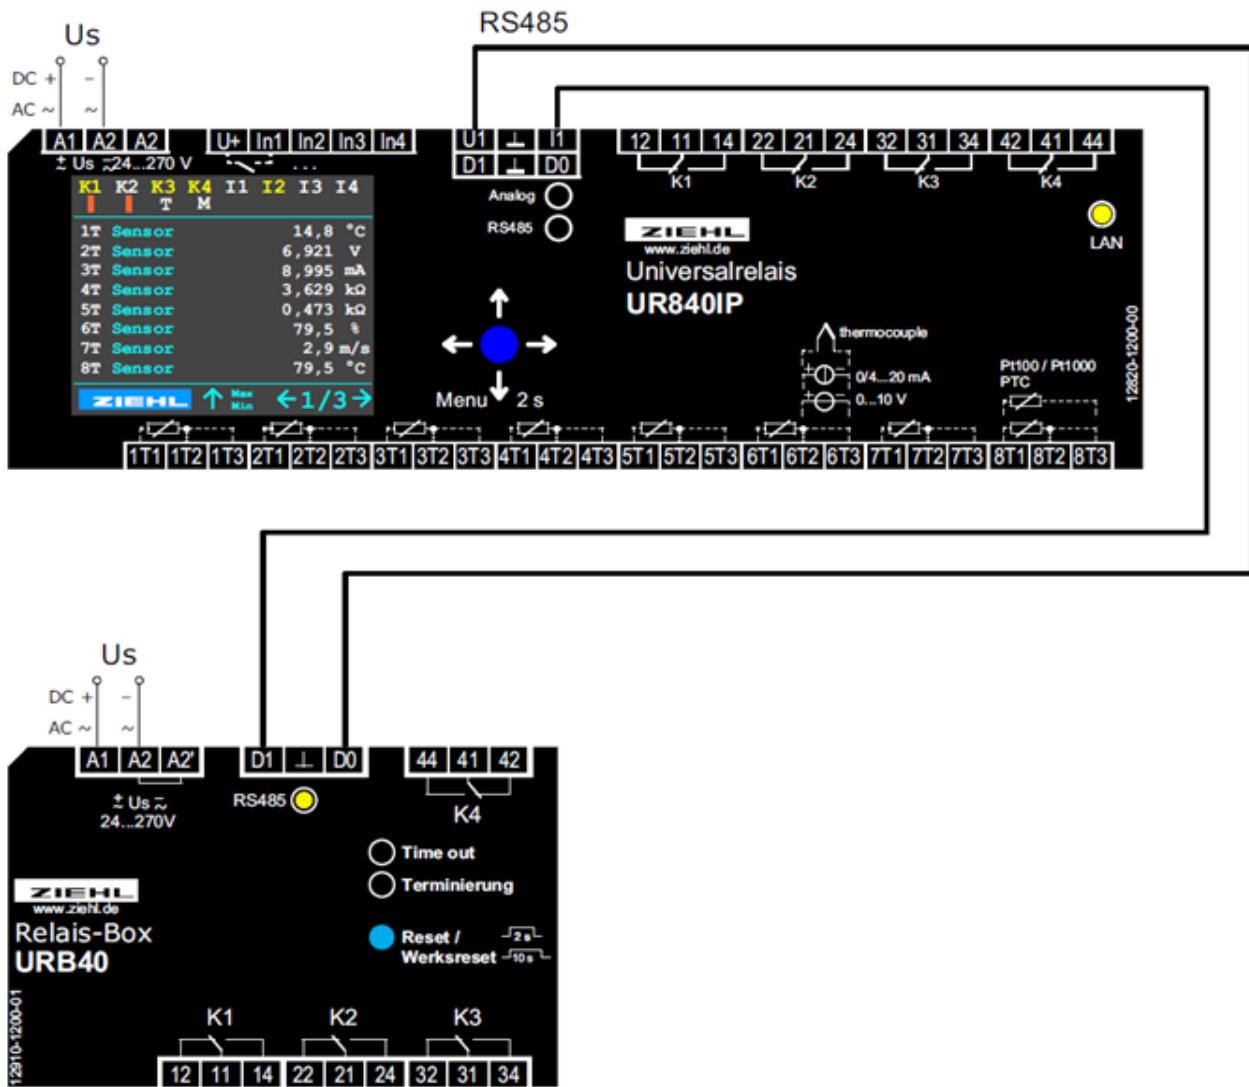

Technical Data URB40

Rated supply voltage Us	Tolerance	DC/AC 24-270 V DC 20.4-297 V	0/50/60 Hz AC 20-297 V
Relay outputs K1, K2, K3, K4	Switching voltage Inrush current N/O contact Minimum values voltage/current Conventional thermal current Ith Switching capacity max. AC cos $\varphi = 1$ Switching capacity max. DC (ohmic) Rated operating current Rated operating voltage	4 x 1 changeover contact max. AC 300 V, DC 300 V AC 15 A 4s 10% ED 12 V 10 mA max. 5 A 1500 VA 0.3 A 300 V; 0.4 A 120 V; 0.8 A 60 V; 8 A 30 V DC-13 le = 2.0 A Ue = 24 V DC-13 le = 0.4 A Ue = 120 V DC-13 le = 0.2 A Ue = 240 V	
RS485 - Interface	Speed Addressing Data bits Stop bits Parity Terminating resistor	4800, 9600, 19200, 57600, 115200 Baud 1-247 8 bits 1, 2 bits even, odd, no 120 ohms (can be switched on & off)	
Test conditions	Rated impulse withstand voltage Overvoltage category Pollution degree Rated insulation voltage Ui Duty cycle insulation Test voltage	EN 61010-1 4000 V III 2 300 V 100 % 3.5 kV, Ueff, 50 Hz, 1 min.	
Installation conditions	Permissible ambient temperature Permissible storage temperature Installation height Climate resistance Permissible wiring temperature Oscillation Shock Seismic stress	-4 °F (-20 °C) ... +149 °F (+65 °C) -4 °F (-20 °C)...+158 °F (+70 °C) < 2000 m above sea level 5-85% relative humidity, no condensation 23 °F ...+158 °F (-5 °C ...+70 °C) IEC 60255-21-1 / class 1 IEC 60255-21-2 / class 1 IEC 60255-21-3 / class 1	
Housing	Dimensions (W x H x D) Width Protection class housing Fastening	Type V4, distributor installation 2.76 x 3.54 x 2.28 in. (70 x 90 x 58 mm) 4 TE IP30 Snap-on fastening on 1.38 in. (35 mm) mounting rail in accordance with EN 60715 or M4 screw fastening (additional latch not included in scope of delivery)	
	Installation position Weight	as required 0.44 lbs (200 g)	